


O1D100



Photoelectric distance sensor

O1DLF3KG/IO-LINK

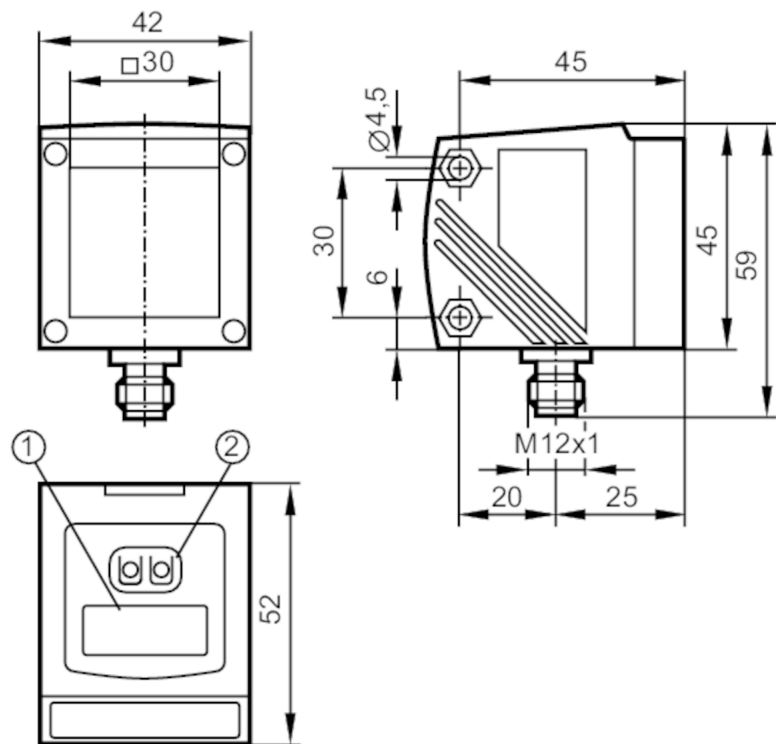

- 1 alphanumeric display 4-digit
2 Programming buttons



Product characteristics

Laser protection class	2
Housing	rectangular

Electrical data

Operating voltage [V]	18...30 DC; (cULus - Class 2 source required)
Current consumption [mA]	< 150
Protection class	III
Reverse polarity protection	yes
Typ. lifetime [h]	50000

Inputs / outputs

Number of inputs and outputs	Number of digital outputs: 2; Number of analog outputs: 1
------------------------------	---

O1D100



Photoelectric distance sensor

O1DLF3KG/IO-LINK


Outputs		
Total number of outputs	2	
Electrical design	PNP	
Number of digital outputs	2	
Output function	normally open / closed; (configurable)	
Max. current load per output [mA]	200	
Number of analog outputs	1	
Analog current output [mA]	4...20; (IEC 61131-2)	
Max. load [Ω]	250	
Analog voltage output [V]	0...10; (IEC 61131-2)	
Min. load resistance [Ω]	5000	
Short-circuit protection	yes	
Type of short-circuit protection	yes (non-latching)	
Overload protection	yes	
Monitoring range		
Max. light spot width [mm]	15	
Max. light spot height [mm]	15	
Light spot dimensions refer to	10 m	
Background suppression [m]	0...19	
Measuring/setting range		
Measuring range [m]	0.2...10; (white paper 200 x 200 mm 90 % remission)	
Sampling rate [Hz]	1...50	
Interfaces		
Communication interface	IO-Link	
Transmission type	COM2 (38,4 kBaud)	
IO-Link revision	1.1	
SDCI standard	IEC 61131-9	
Profiles	Smart Sensor: Sensor Identification; Binary Data Channel; Process Value; Sensor Diagnosis	
SIO mode	yes	
Required master port class	A	
Process data analog	2	
Process data binary	3	
Min. process cycle time [ms]	6	
Supported DeviceIDs	Type of operation	DeviceID
	default	806
Operating conditions		
Ambient temperature [°C]	-10...60	
Protection	IP 67	

O1D100



Photoelectric distance sensor

O1DLF3KG/IO-LINK

Tests / approvals		
EMC	EN 60947-5-2	
Laser protection class	2	
Notes on laser protection	Caution:	Laser light
	Power:	<= 4 mW
	Wave length:	650 nm
	pulse:	1,3 ns
	Do not stare into beam.	
	Avoid exposure to the laser light.	
	laser class:	2
	EN / IEC60825-1:2007	
	EN / IEC60825-1:2014	
	Complies with 21 CFR 1040 except for deviations pursuant to Laser Notice No. 50, dated June 2007.	
MTTF	[years]	182
Mechanical data		
Weight	[g]	243.5
Housing	rectangular	
Dimensions	[mm]	59 x 42 x 52
Material	housing: diecast zinc; front lens: glass; LED window: PC	
Lens alignment	Side sensing	
Displays / operating elements		
Display	Switching status	2 x LED, yellow
	Power	LED, green
	Distance, programming	alphanumeric display, 4-digit
Accessories		
Accessories (optional)	Protective cover, E21133	
Remarks		
Remarks	For more information about the measuring range / application please refer to the operating instructions.	
Pack quantity	1 pcs.	
Electrical connection		
Connector: 1 x M12; coding: A		
		


O1D100



Photoelectric distance sensor

O1DLF3KG/IO-LINK

Connection

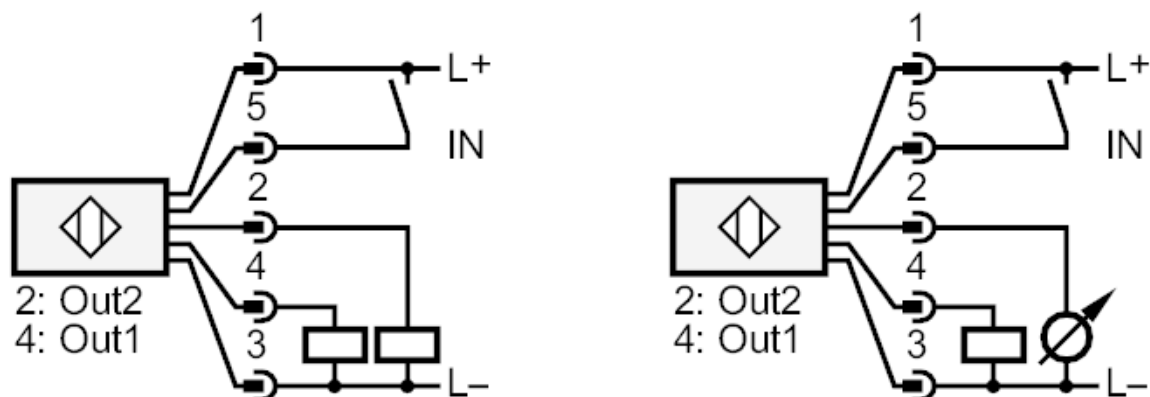

2: OUT2 Switching output or 4...20 mA / 0...10 V

4: OUT1 switching output or IO-Link

5: IN Laser On/ Off

Other data

Parameter	Setting range	Factory setting
Uni	mm, m, inch	mm
OU1	Hno, Hnc, Fno, Fnc	Hno
SP1 [mm]	200...9999	1000
nSP1 [mm]	200...9999	800
FSP1 [mm]	200...9999	1200
OU2	Hno, Hnc, Fno, Fnc, I, U	I
SP2 [mm]	200...9999	2000
nSP2 [mm]	200...9999	1800
FSP2 [mm]	200...9999	2200
ASP [mm]	0...9999	0
AEP [mm]	0...9999	9999
rATE [Hz]	1...50	50
dS1 [s]	0...0.1...5	0
dr1 [s]	0...0.1...5	0
dS2 [s]	0...0.1...5	0
dr2 [s]	0...0.1...5	0
dFo [s]	0...0.1...5	0
dIS	d1...3 ; rd1...3; OFF	d3

O1D100



Photoelectric distance sensor

O1DLF3KG/IO-LINK

Repeatability / Accuracy

read/write distance (mm)	Repeatability of the measured values		Accuracy	
	white (90 % remission)	grey (18 % remission)	white (90 % remission)	grey (18 % remission)
200...1000 mm	± 5.0 mm	±7.5 mm	± 15.0 mm	± 18.0 mm
1000...2000 mm	± 5.5 mm	±10.0 mm	± 15.0 mm	± 20.0 mm
2000...4000 mm	± 17.5 mm	±22.5 mm	± 25.0 mm	± 32.0 mm
4000...6000 mm	± 27.5 mm	±40.0 mm	± 35.0 mm	± 50.0 mm
6000...10000 mm	± 60.0 mm		± 70.0mm	
Sampling rate		50 Hz		
Extraneous light on the object		< 40 klx		

Repeatability / Accuracy

read/write distance (mm)	Repeatability of the measured values		Accuracy	
	white (90 % remission)	grey (18 % remission)	white (90 % remission)	grey (18 % remission)
200...1000 mm	± 16.5 mm	±16.5 mm	± 26.5 mm	± 26.5 mm
1000...2000 mm	± 16.5 mm	±16.5 mm	± 26.5 mm	± 26.5 mm
2000...4000 mm	± 30.0 mm	±37.0 mm	± 40.0 mm	± 47.0 mm
4000...6000 mm	± 37.0 mm	±57.0 mm	± 47.0 mm	± 67.0 mm
6000...10000 mm	± 75.0 mm	—	± 85.0mm	—
Sampling rate		50 Hz		
Extraneous light on the object		40...100 klx		

Repeatability / Accuracy

read/write distance (mm)	Repeatability of the measured values		Accuracy	
	white (90 % remission)	grey (18 % remission)	white (90 % remission)	grey (18 % remission)
200...1000 mm	± 4.0 mm	±4.5 mm	± 14.0 mm	± 15.0 mm
1000...2000 mm	± 4.5 mm	±6.0 mm	± 14.5 mm	± 16.0 mm
2000...4000 mm	± 13.5 mm	±14.5 mm	± 23.5 mm	± 24.0 mm
4000...6000 mm	± 19.0 mm	±21.0 mm	± 29.0 mm	± 31.0 mm
6000...10000 mm	± 37.0 mm	—	± 47.0mm	—
Sampling rate		1 Hz		
Extraneous light on the object		< 40 klx		

O1D100



Photoelectric distance sensor

O1DLF3KG/IO-LINK

Repeatability / Accuracy

read/write distance (mm)	Repeatability of the measured values		Accuracy	
	white (90 % remission)	grey (18 % remission)	white (90 % remission)	grey (18 % remission)
200...1000 mm	± 10.0 mm	± 10.0 mm	± 20.0 mm	± 20.0 mm
1000...2000 mm	± 10.0 mm	± 10.0 mm	± 20.0 mm	± 20.0 mm
2000...4000 mm	± 17.0 mm	± 18.0 mm	± 27.0 mm	± 28.0 mm
4000...6000 mm	± 22.0 mm	± 25.0 mm	± 32.0 mm	± 35.0 mm
6000...10000 mm	± 37.0 mm	—	± 47.0mm	—
Sampling rate	1 Hz			
Extraneous light on the object	< 40...100 klx			
-	-			
Range on black object (6 % remission)	<= 4000 mm			
-	-			
The values apply at				
constant ambient conditions	23 °C / 960 hPa			
minimum power-on time in minutes	10			